

MA90



Reliable, stable, high quality machining with extended tool life

Unique tangential 90° End mill design provides a large variety of machining operations

Newly designed inserts with grade PR18 series coating technology

High quality surface finish and excellent wall accuracy

Supports multi-functional machining
such as 3D milling

New Corner R Available
R4.0 / R5.0 / R6.0



NEW



**KEEPS YOU
AHEAD**



Tangential 90° End mill with 4-Edge inserts

MA90

Original tangential 90° End mill with economical 4-edge inserts.
New grade PR18 Series and unique insert cutting edge design creates high-quality machining with longer tool life.

1 The MA90 provides a large variety of machining operations

Challenges

- Conventional End mill**
- Sudden fractures can cause damage to the holder
 - Insert defects preventing use of all four corners
- Tangential End mill**
- Premature tool wear can quickly deteriorate the surface finish quality
 - Poor wall accuracy

SOLUTION

Kyocera's MA90 tangential End mill solves these problems with a unique insert shape and PR18 Series grade technology.

Large web thickness

High rigidity


Peripheral grinding specifications

Excellent wall accuracy

Special wiper edge

Large relief angle suppresses wear
High-quality surface finish



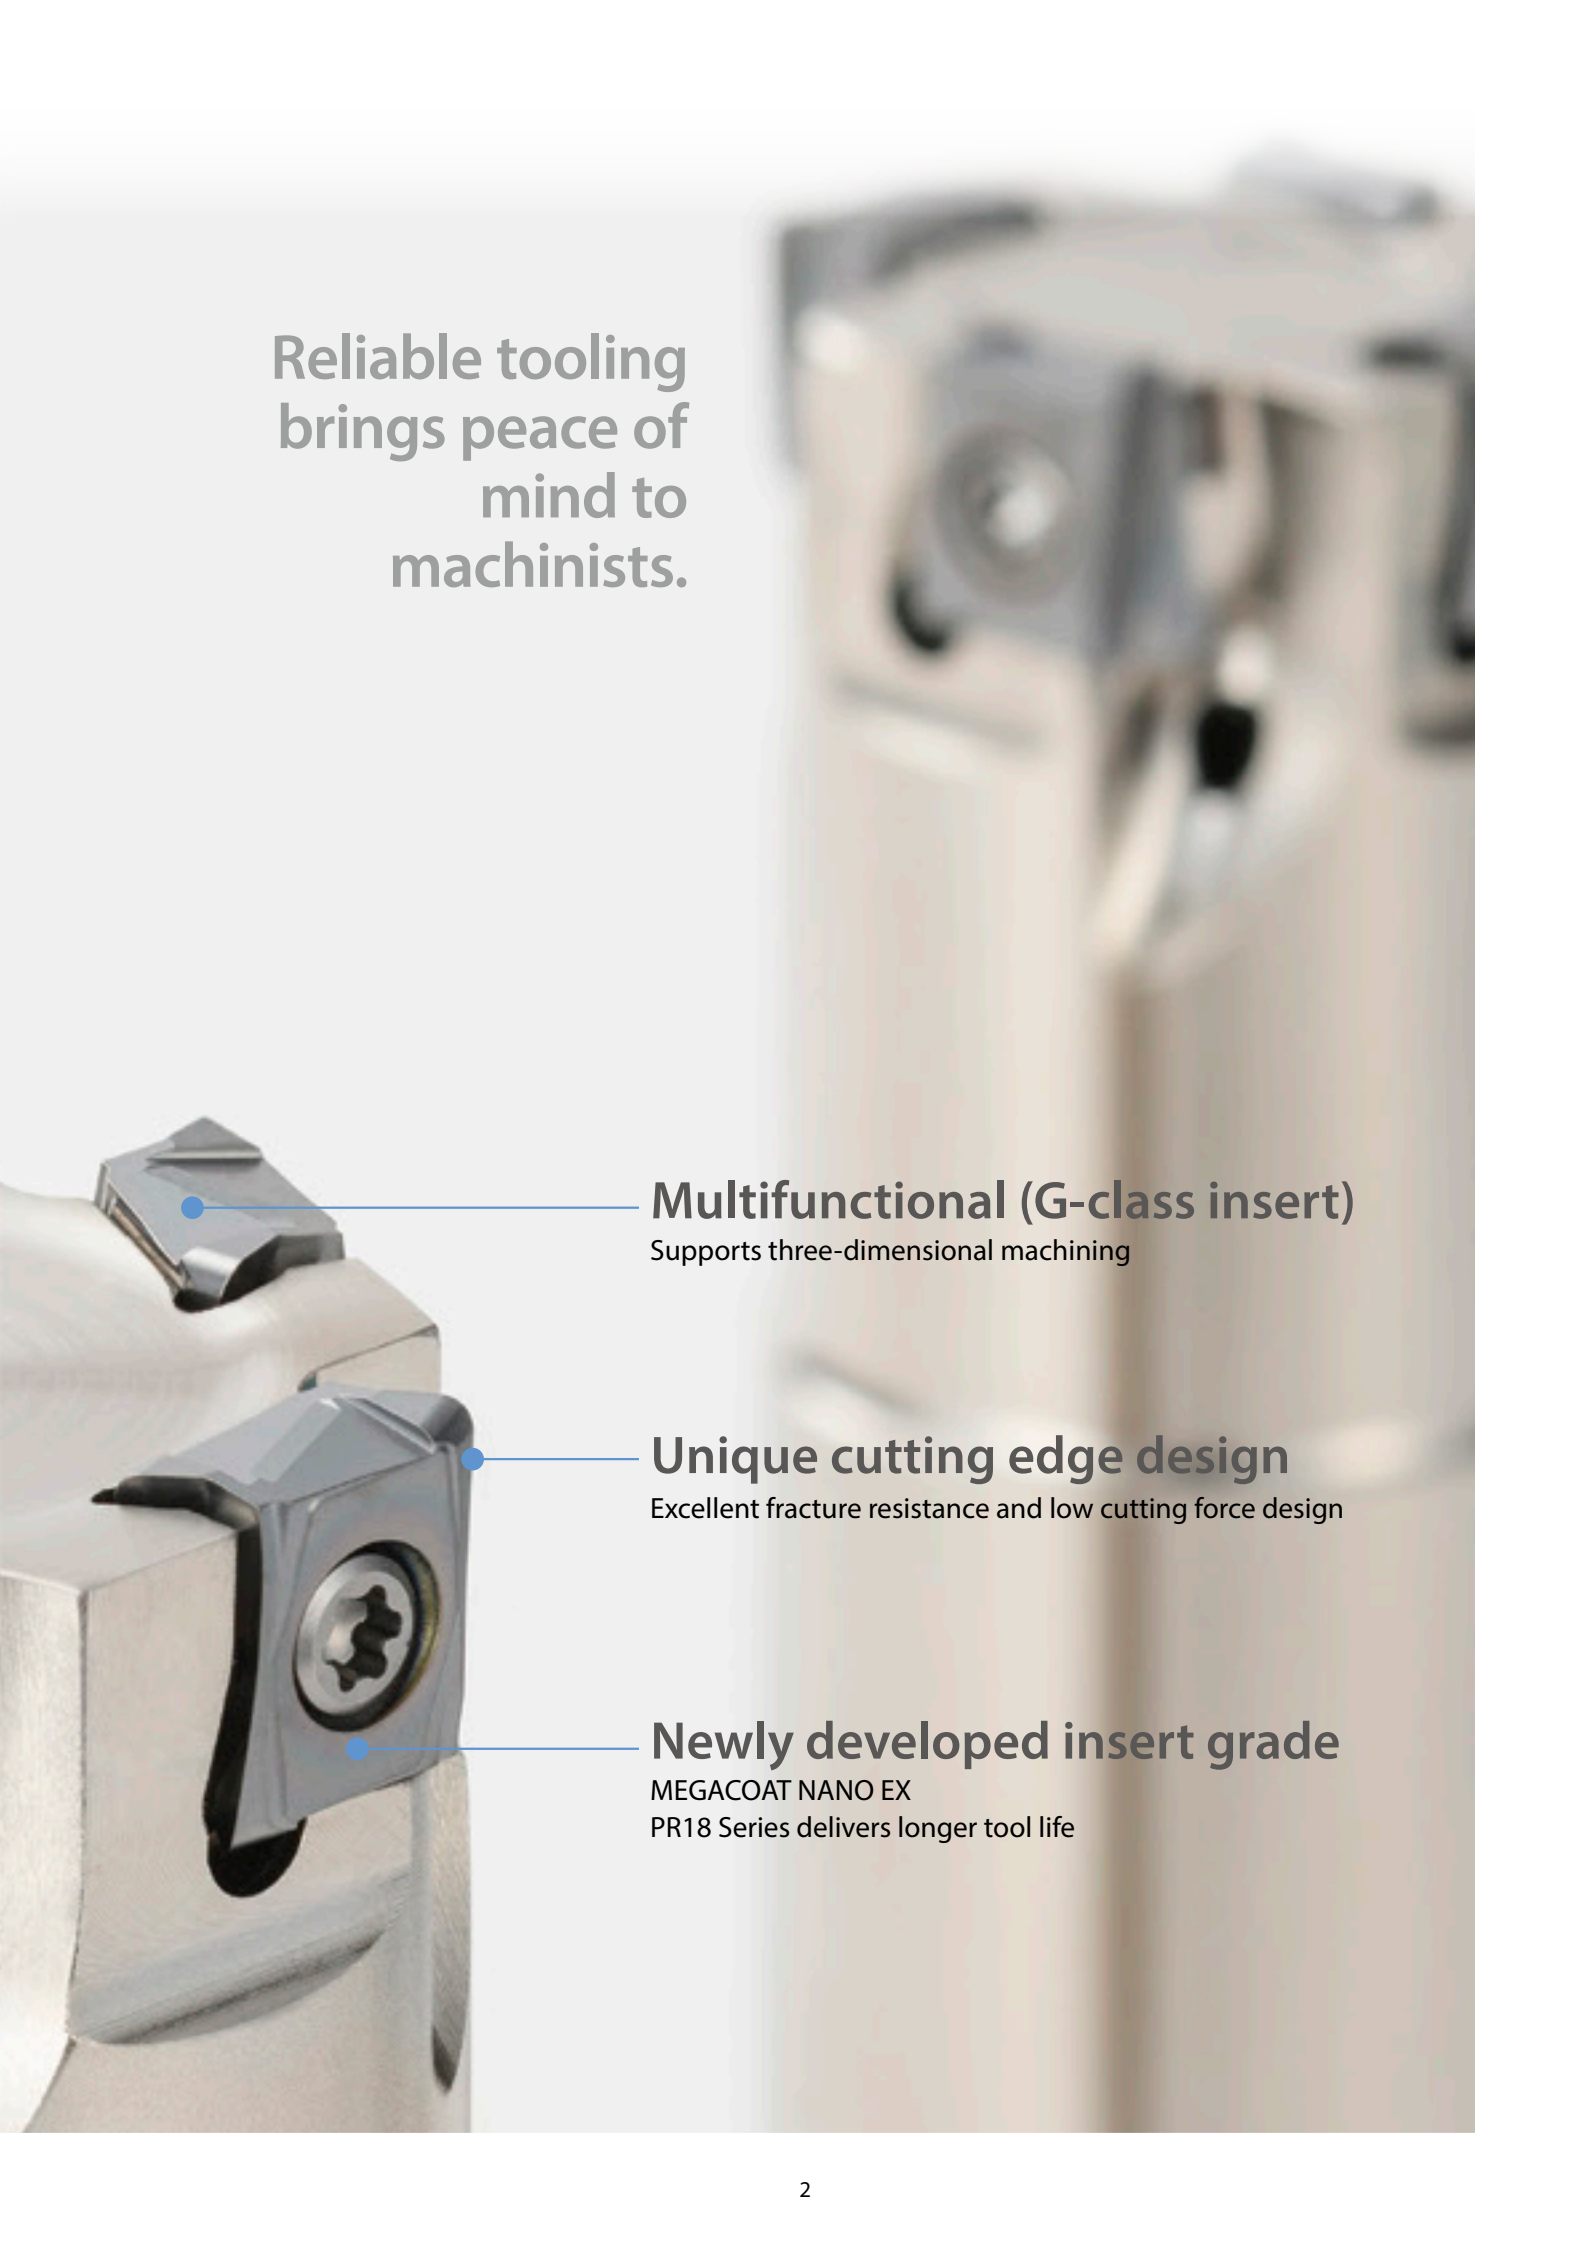

Reliable tooling
brings peace of
mind to
machinists.

Multifunctional (G-class insert)

Supports three-dimensional machining

Unique cutting edge design

Excellent fracture resistance and low cutting force design

Newly developed insert grade

MEGACOAT NANO EX

PR18 Series delivers longer tool life

2

New insert grade PR18 series provides a significantly longer tool life



Next-generation insert grade for milling

NEW

PR18 Series

Kyocera NANO layer coating technology

Longer tool life with next-generation coating for milling




Double lamination technology maintains longer tool life

Multi-layer structure with two unique NANO layers
Superior abrasion resistance and fracture resistance


Special nano layer x Multilayer lamination

NANO-Layer



AlCr-based coating
with excellent abrasion resistance

NANO-Layer




AlTi-based coating
with excellent heat resistance

Multi-layering of high-performance NANO layers
Increases toughness with suppression of crack growth and optimization of internal stress

CG Image


Extensive lineup of insert grades covers a variety of machining materials and applications

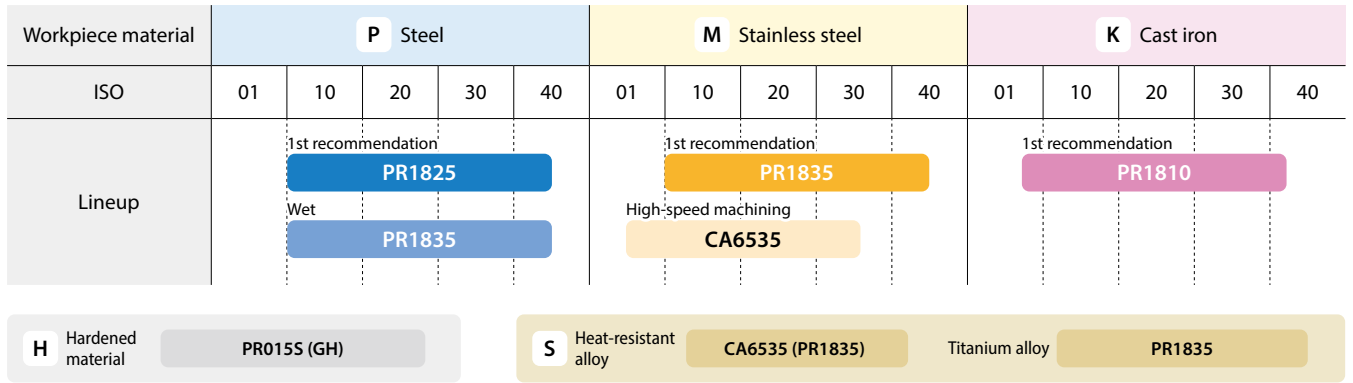


PR1825 Wear resistance comparison (Internal evaluation)
V-T graph

Life criteria:
Flank face wear = 0.10 mm

Cutting conditions:
Vc = **160 / 300** m/min
ap × ae = 2.0 × 110 mm, fz = 0.12 mm/t
SCM440 Dry
PNMU1205ANER-GM (MFPN)

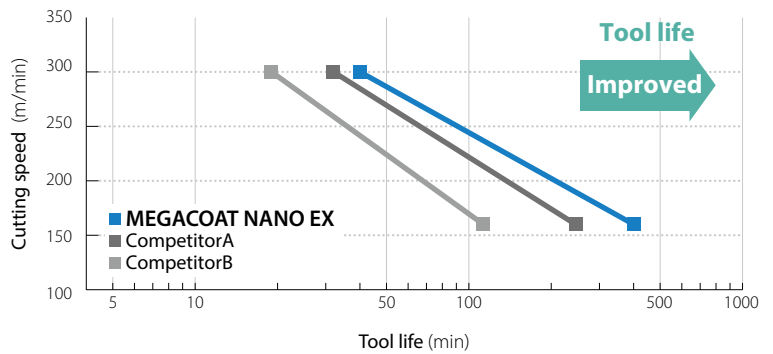


Coating characteristics (Internal evaluation)

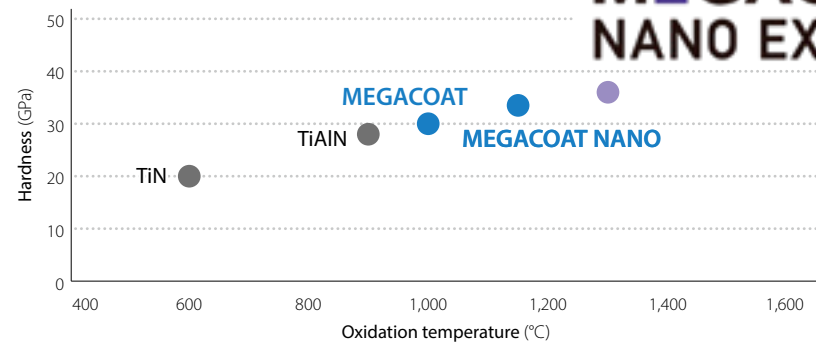

Oxidation progression comparison (Internal evaluation)


Suppresses oxidation progression with excellent oxidation resistance

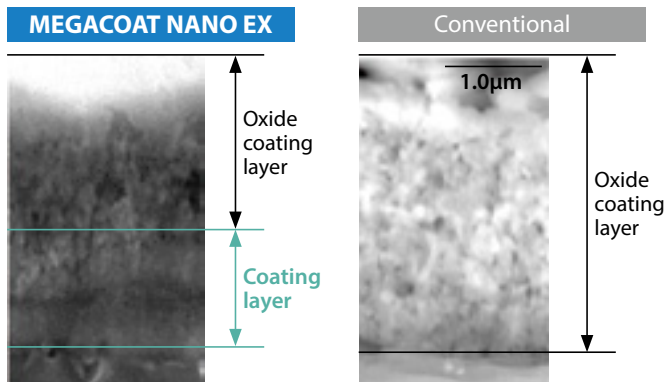

*Section after holding at 1,200 degrees for 30 minutes in air

Coating layer toughness evaluation (Internal evaluation)

Excellent coating toughness with small crack length

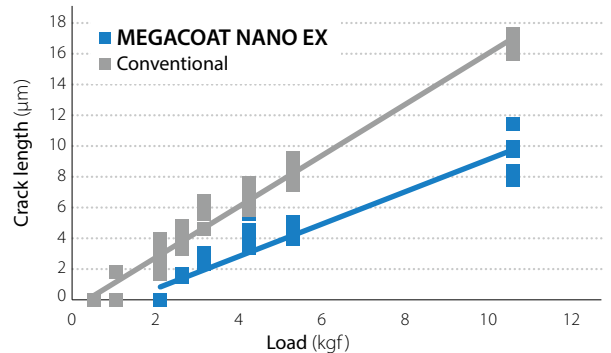

*Micro-Vickers measurement

3

Achieve reliable results with an insert shape designed for high quality machining and long tool life

Unique cutting edge design delivers high fracture resistance and low cutting forces

Special wiper edge and peripheral grinding specifications provide high quality finish and long tool life



Advantage

Both the A.R. and the relief angle of the wiper edge are large.
Low resistance and excellent surface finish



Unique cutting edge design

Superior fracture resistance and low cutting force

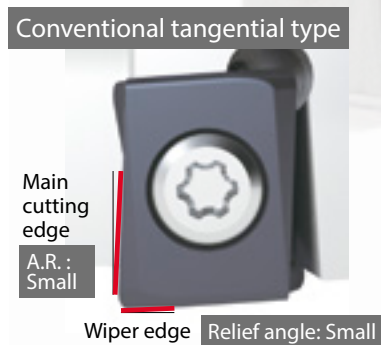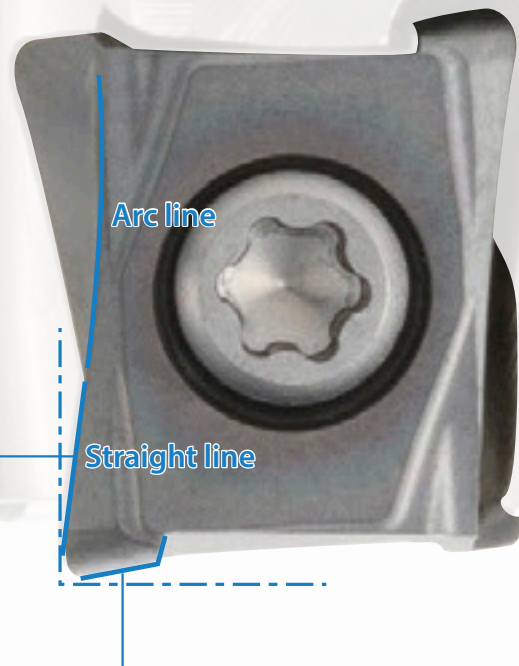

Special wiper edge


Large relief angle: Excellent surface finish and wear suppression
Stepped corners: Designed to prevent seat damage

Excellent surface finish


Special wiper edge design suppresses abrasion progress of the edge. Maintains high-quality finished surface

Wear and surface finish comparison (Internal evaluation)

Wiper edge wear

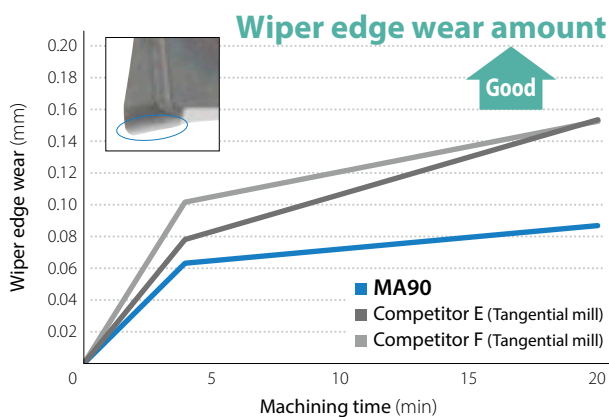

Surface finish roughness (Bottom surface)

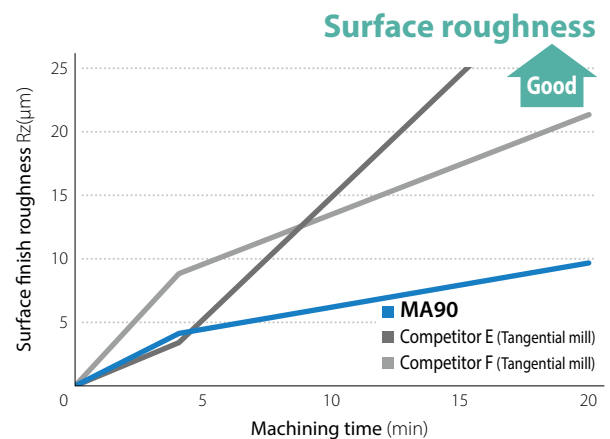

Cutting conditions: $V_c = 200$ m/min, $a_p \times a_e = 1 \times 37.5$ mm, $f_z = 0.1/0.12$ mm/t, Dry S50C $\phi 50$ (6/7 inserts) BT50


>>> Excellent wall accuracy

Peripheral grinding specifications

Unique, sloped, edge shape
Grounded peripheral provides higher precision



Wall accuracy comparison (Internal evaluation)

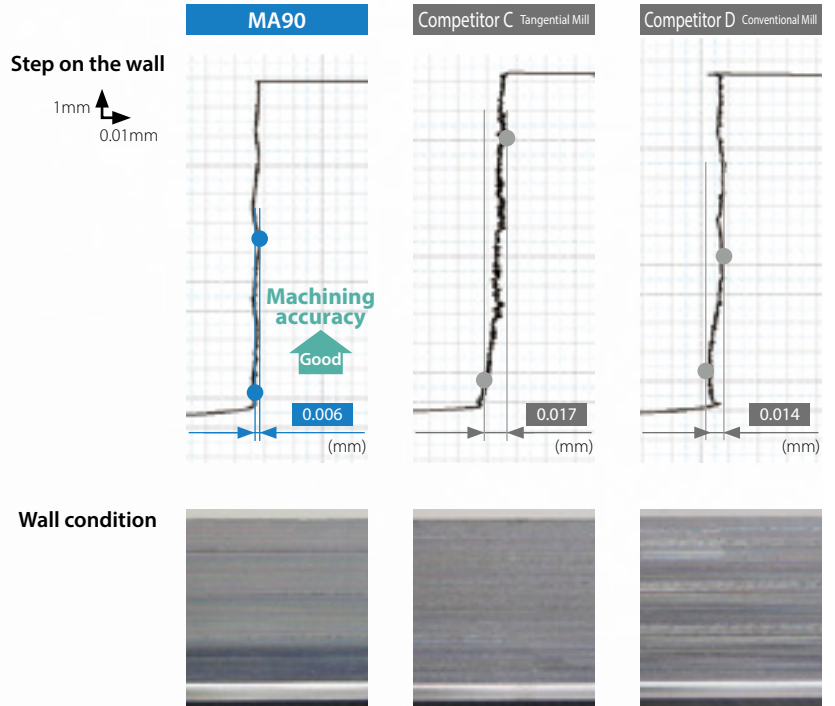

Cutting conditions: $V_c = 150$ m/min, $a_p \times a_e = 3 \times 5$ mm 4 passes, $f_z = 0.1$ mm/t, Dry S50C Dia.20 (3 inserts) BT50

>>> Long tool life and high-speed machining

Test 1

Even if the main cutting edge is in good condition, the tool reached the end of life due to deterioration of the finished surface.




Test 2

Machined with reduced cutting speed because the surface finish deteriorated early.



Edge condition and finished surface

		MA90	Competitor E Tangential	Competitor F Tangential
Wiper edge	After 3.8 min			
	After 6.5 min			
Main cutting edge		Abrasion progress: Small Good	Wear progress: Large Good	Spark generation Wear progress: Large Spark generation Good
Finished surface	After 13.1 min	Good 8.0µmRz (1.3µmRa)	Cloudy finish 20.6µmRz (2.2µmRa)	Surface finish deteriorating 14.9µmRz (3.0µmRa)
	Results	Main cutting edge: Good Wiper edge wear: Small wear Good finished surface and can continue to use	Main cutting edge: Good Wiper edge wear: Progressive Worse finished surface	Main cutting edge: Good Wiper edge wear: Progressive Worse finished surface

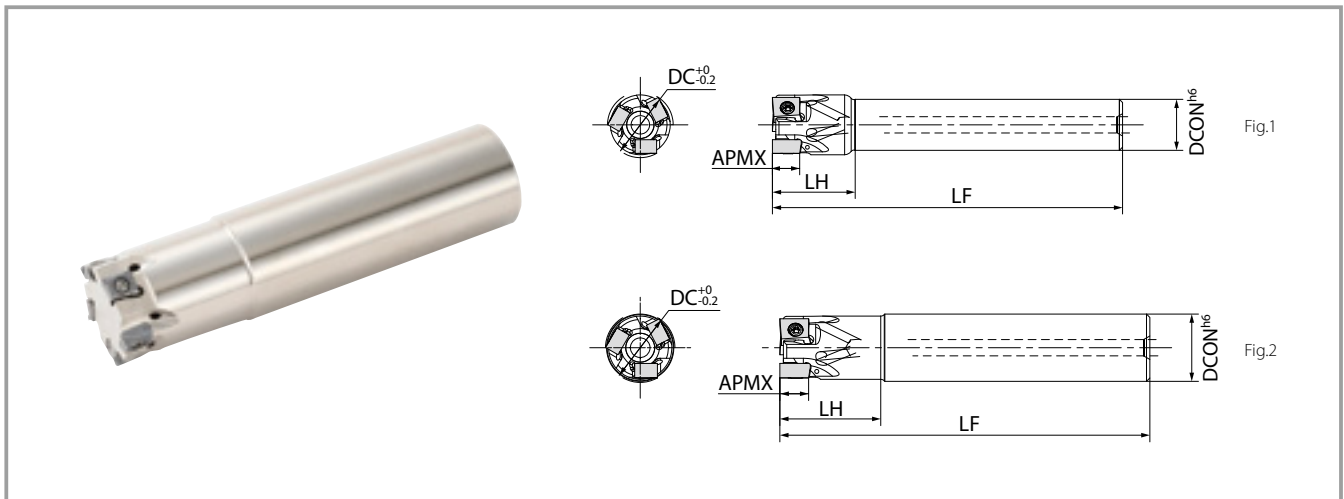

Toolholder dimensions 09 size (LOGU09 ...)

Description	Availability	Number of inserts	Dimensions (mm)					Coolant hole	Shape	Weight (kg)	Maximum number of revolutions (min ⁻¹)			
			DC	DCON	LF	LH	APMX							
Standard shank	MA90 -	16S12-09T2C	●	2	16	12	100	23	8	Yes	Fig.1	0.1	29,500	
		18S16-09T2C	●		18	16							27,900	
	20S16-09T2C	●	3	20	20	110	26	0.2				26,600		
	20S16-09T3C	●		22								25,400		
	22S20-09T3C	●		25								23,900		
	25S20-09T3C	●	4	25	25	120	29	0.3				23,900		
	25S20-09T4C	●		28								22,600		
	28S25-09T3C	●	4	30	32	130	32	0.5				21,900		
	30S25-09T4C	●		32								21,200		
	32S25-09T4C	●	5	35	150	50	0.9	20,300						
	32S25-09T5C	●	4					19,000						
	35S32-09T4C	●	5	40	32	120	40	0.9				17,000		
	35S32-09T5C	●		50								17,000		
	40S32-09T4C	●	7	50	32	120	40	0.9				17,000		
	40S32-09T6C	●		50								17,000		
	50S32-09T5C	●	2	16	16	100	26	8				Yes	Fig.2	0.1
50S32-09T7C	●	20		20					110	30	26,600			
Same size shank	MA90 -	20S20-09T2C	●	3	20	25	120	32	8	Yes	Fig.2	0.4	23,900	
		20S20-09T3C	●		25								25	120
	25S25-09T3C	●	32		32							130	40	21,200
	25S25-09T4C	●	4	32	32	130	40	0.7				21,200		
	32S32-09T4C	●		32								32	130	40
32S32-09T5C	●	5	32	32	130	40	21,200							
Long shank	MA90 -	20S18-09T2CL	●	2	20	18	150	30	8	Yes	Fig.1	0.3	26,600	
		20S20-09T2CL	●		20	20	150	40					26,600	
		25S25-09T2CL	●		25	25	170	50					Fig.2	23,900
		32S32-09T2CL	●		32	32	200	65						21,200

Maximum number of revolutions.

Set the number of revolutions per minute within the recommended cutting speed specified by the workpiece on Page 13.

Do not use the End mill or cutter at the maximum revolution or higher since the centrifugal force may cause chips and parts to scatter even under no load.

● Available

Toolholder dimensions 12 size (LOGU12 ...)

Description	Avail-ability	Number of inserts	Dimensions (mm)					Coolant hole	Shape	Weight (kg)	Maximum number of revolutions (min ⁻¹)		
			DC	DCON	LF	LH	APMX						
Standard shank	●	2	25	20	120	29	12	Yes	Fig.1	0.3	18,300		
			28	25						130	32	0.4	17,300
		30	2		32	0.5						16,800	
		30S25-12T3C		3						3	35		150
		32S25-12T2C	2	4	40	120						40	
		32S25-12T3C	●							6	50		120
		35S32-12T3C	●	4	40	150						50	
		40S32-12T3C	●							3	35		150
		40S32-12T4C	●	4	40	120						40	
		50S32-12T4C	●							6	50		120
		50S32-12T6C	●	2	25	25						120	
Same size shank	MA90 -	25S25-12T2C	●				2	25	25	120	32		12
				32S25-12T2C	●	3						32	
Long shank	MA90 -	25S25-12T2CL	●	2	25		25	170	50	12	Yes		Fig.2
						32S32-12T2CL						●	





Maximum number of revolutions.

Set the number of revolutions per minute within the recommended cutting speed specified by the workpiece on Page 13.


Do not use the End mill or cutter at the maximum revolution or higher since the centrifugal force may cause chips and parts to scatter even under no load.

● Available

Parts / Applicable inserts

Description			Clamp screw	Wrench	Anti-seizure compound	Arbor bolt		
								
09 size (LOGU09...)	End mill Modular	MA90-16...-09...	SB-44865UTRP	DTPM-8	P-37	-		
		MA90-18...-09...	Tightening torque for clamping insert 1.2 N•m			-		
		MA90-20...-09...				-		
	Face mill	MA90-040R-09...	SB-44880UTRP	DTPM-8		HH8×25		
		MA90-050R-09...	Tightening torque for clamping insert 1.2 N•m			HH10×30		
		MA90-063R-09...						
12 size (LOGU12...)	End mill Modular	MA90-...-12...			P-37	-		
	Face mill	MA90-040R-12...-M				HH8×25		
		MA90-050R-12...-M				HH10×30		
		MA90-063R-12...-M						
		MA90-080R-12...-M	SB-40104TRP	DTPM-15		HH12×35		
		MA90-100R-12...-M				Tightening torque for clamping insert 3.5 N/m		-
		MA90-125R-12...-M						
		MA90-080R-12...				HH12×35		
	MA90-100R-12...							
MA90-125R-12...			-					

MA90 Face mill

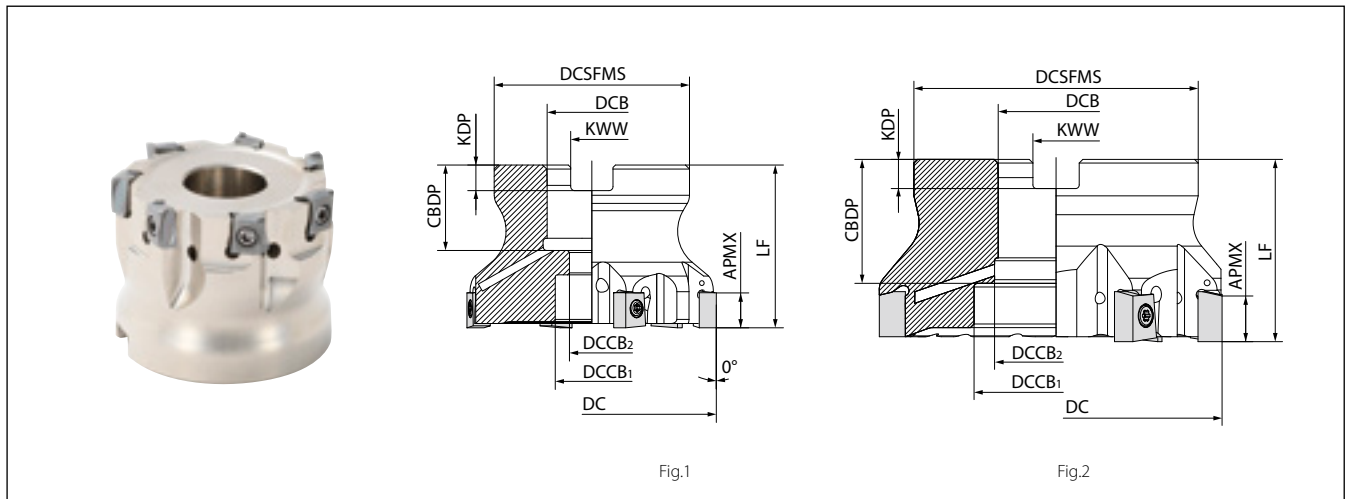

Toolholder dimensions 09 size (LOGU09...)

Description	Avail-ability	Number of inserts	Dimensions (mm)										Coolant hole	Shape	Weight (kg)	Maximum number of revolutions (min ⁻¹)
			DC	DCSFMS	DCB	DCCB ₁	DCCB ₂	LF	CBDP	KDP	KWW	APMX				
MA90 - 040R-09T4C-M	●	4	40	38	16	15	9	19	5.6	8.4	8	Yes	Fig.1	0.2	26,600	
040R-09T6C-M	●	6														
050R-09T5C-M	●	5	50	48	22	18	11	40	21	6.3	10.4	Yes	Fig.1	0.4	23,900	
050R-09T7C-M	●	7														
063R-09T6C-M	●	6	63	48	22	18	11	40	21	6.3	10.4	Yes	Fig.1	0.5	21,200	
063R-09T9C-M	●	9														

Maximum number of revolutions.

Set the number of revolutions per minute within the recommended cutting speed specified by the workpiece on Page 13.

Do not use the End mill or cutter at the maximum revolution or higher since the centrifugal force may cause chips and parts to scatter even under no load.

● Available

Toolholder dimensions 12 size (LOGU12...)


Description	Avail-ability	Number of inserts	Dimensions (mm)										Coolant hole	Shape	Weight (kg)	Maximum number of revolutions (min ⁻¹)
			DC	DCSFMS	DCB	DCCB ₁	DCCB ₂	LF	CBDP	KDP	KWW	APMX				
MA90 - 040R-12T3C-M	●	3	40	38	16	14	9	19	5.6	8.4	12	Yes	Fig.1	0.2	14,600	
040R-12T4C-M	●	4														
050R-12T4C-M	●	4	50	48	22	18	11	40	21	6.3	10.4	Yes	Fig.1	0.3	13,100	
050R-12T6C-M	●	6														
063R-12T6C-M	●	6	63	48	22	18	11	40	21	6.3	10.4	Yes	Fig.1	0.4	11,700	
063R-12T8C-M	●	8														
080R-12T7C-M	●	7	80	70	27	20	13	50	24	7	12.4	Yes	Fig.1	1.2	10,400	
080R-12T10C-M	●	10														
100R-12T9C-M	●	9	100	78	32	45	-	50	30	8	14.4	Yes	Fig.2	1.5	9,300	
100R-12T13C-M	●	13														
125R-12T12C-M	●	12	125	89	40	55	-	63	33	9	16.4	Yes	Fig.2	2.5	8,300	
125R-12T16C-M	●	16														

Maximum number of revolutions.

Set the number of revolutions per minute within the recommended cutting speed specified by the workpiece on Page 13.

Do not use the End mill or cutter at the maximum revolution or higher since the centrifugal force may cause chips and parts to scatter even under no load.

● Available

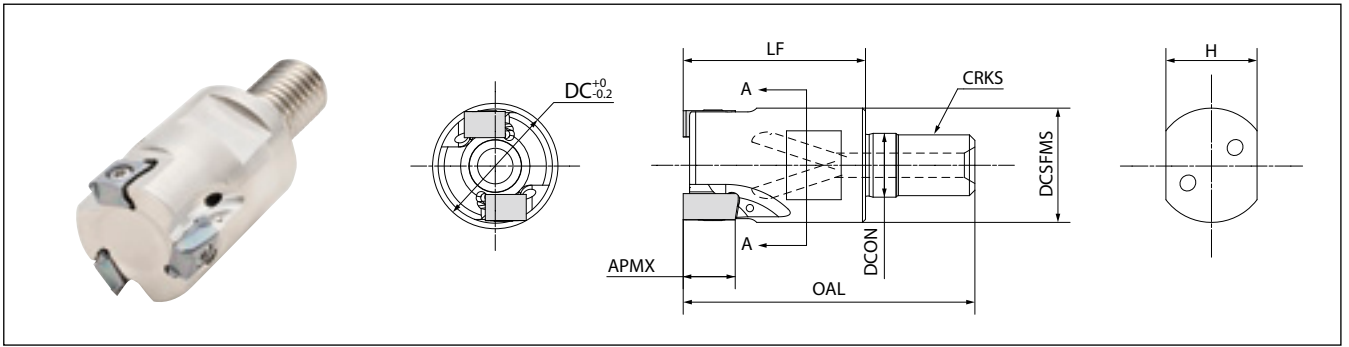

Toolholder dimensions 09 size (LOGU09...)

Description	Availability	Number of inserts	Dimensions (mm)								Coolant hole	Maximum number of revolutions (min ⁻¹)	
			DC	DCSFMS	DCON	OAL	LF	CRKS	H	APMX			
MA90 - 20M10-09T2C	●	2	20	18.8	10.5	48	30	M10×P1.5	15	8	Yes	19,000	
20M10-09T3C	●	3											
25M12-09T3C	●	4	25	23	12.5	56	35	M12×P1.75	19				
25M12-09T4C	●												
32M16-09T4C	●	5	32	30	17	62	40	M16×P2.0	24				15,100
32M16-09T5C	●												

●: Available

Toolholder dimensions 12 size (LOGU12...)

Description	Availability	Number of inserts	Dimensions (mm)								Coolant hole	Maximum number of revolutions (min ⁻¹)
			DC	DCSFMS	DCON	OAL	LF	CRKS	H	APMX		
MA90 - 25M12-12T2C	●	2	25	23	12.5	56	35	M12×P1.75	19	12	Yes	18,300
32M16-12T2C	●		32	30	17	62	40	M16×P2.0	24			16,300
32M16-12T3C	●	3										


●: Available

Maximum number of revolutions.

Set the number of revolutions per minute within the recommended cutting speed specified by the workpiece on Page 13.

Do not use the End mill or cutter at the maximum revolution or higher since the centrifugal force may cause chips and parts to scatter even under no load.

BT arbor for modular type (for exchangeable head/two face contact)

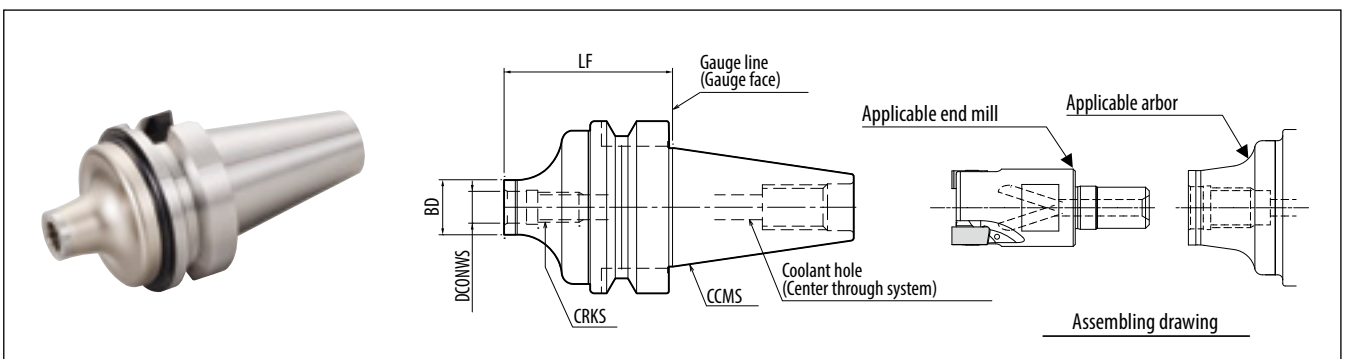

Dimensions

Description	Availability	Dimensions (mm)					Coolant hole	Arbor (Two-face clamping)	Applicable end mill (Head)
		LF	BD	DCONWS	CRKS	CCMS			
BT30K- M10-45	●	45	18.7	10.5	M10×P1.5	Yes	BT30	MA90...M10-..	
M12-45	●	45	23	12.5	M12×P1.75			MA90...M12-..	
BT40K- M10-60	●	60	18.7	10.5	M10×P1.5	Yes	BT40	MA90...M10-..	
M12-55	●	55	23	12.5	M12×P1.75			MA90...M12-..	
M16-65	●	65	30	17	M16×P2.0			MA90...M16-..	

●: Available

BT Arbor for modular type (for exchangeable head/two face contact)

Actual end mill depth

DC	LF	LUX	Arbor description	Applicable end mill (Head)			Actual end mill depth(mm)
				Description	Cutting dia. (mm)	Dimensions (mm)	LUX
					DC	LF	
BT30K-	M10-45	MA90-20M10-...	20	30	36.8		
		MA90-25M12-...	25	35	42.8		
BT40K-	M10-60	MA90-20M10-...	20	30	38.7		
		MA90-25M12-...	25	35	44.6		
	M16-65	MA90-32M16-...	32	40	51.2		

Case Studies

Brake parts FCD500

Vc = 135 m/min
 n = 535 min⁻¹
 ap x ae = 3.4 x 25 mm
 fz = 0.15 mm/t
 Vf = 560 mm/min
 Wet
 MA90-080R-12T7C-M
 LOGU120616ER-GM (PR1810)



Number of Workpieces

MA90 (7 inserts) **1,000 pcs**

Competitor G (7 inserts) **600 pcs**

Tool life


x1.6

MA90 showed good cutting edge condition and stable machining. Achieved 1.6 times longer tool life.

(User evaluation)

Mold parts Stainless steel

Vc = 125 m/min
 n = 1,600 min⁻¹
 ap x ae = 1.0 x 25 mm
 fz = 0.12 mm/t
 Vf = 570 mm/min
 Dry
 MA90-25S20-09T3C
 LOGU090408ER-GM (PR1835)



Machining efficiency

MA90 (3 inserts) **Q = 14.5 cc/min**








Competitor H (3 inserts) **Q = 9.5 cc/min**

x1.5
Machining efficiency

MA90 showed 1.5 times higher machining efficiency than its competitors. Improved tool life (3 to 4 pcs)

(User evaluation)

Applicable Insert

Usage classification		P	Carbon steel/Alloy steel		★	☆							Applicable toolholder
			Mold steel		★	☆							
★ : 1st recommendation ☆ : 2nd recommendation		M Stainless steel	Austenitic			★	☆						
			Martensitic			☆						★	
			Precipitation hardening system			★							
		K	Gray cast iron					★					
			Ductile cast iron					★					
S	Heat-resistant alloys					☆					★		
	Titanium alloy					★							
H	Hardened material										★		
	Shape	Description	No. of edges	Dimensions (mm)						MEGACOAT (PVD coating)			
W1				S	D1	INSL	BS	RE	PR1825	PR1835	PR1810	PR0155	CA6535
 General purpose (G-class)	LOGU 090404ER-GM 090408ER-GM 090412ER-GM 090416ER-GM	4	4.3	6.77 6.71 6.65 6.59	3.33	8.89	1.29	0.4	●	●	●	-	●
							0.90	0.8	●	●	●	-	●
							0.49	1.2	●	●	●	-	●
							0.10	1.6	●	●	●	-	●
 Low cutting force (G-class)	LOGU 090404ER-SM 090408ER-SM 090412ER-SM 090416ER-SM	4	4.3	6.77 6.71 6.65 6.59	3.33	8.89	1.29	0.4	●	●	-	-	●
							0.89	0.8	●	●	-	-	●
							0.49	1.2	●	●	-	-	●
							0.10	1.6	●	●	-	-	●
 Tough edge (G-class)	LOGU 090408ER-GH	4.3	6.71	3.33	8.89	0.90	0.8	●	●	●	●	-	
 General purpose (G-class)	LOGU 120604ER-GM 120608ER-GM 120612ER-GM 120616ER-GM 120620ER-GM 120624ER-GM 120630ER-GM	4	6.6	10.10 10.04 9.97 9.92 9.85 9.79 9.69	4.55	13.28	2.50	0.4	●	●	●	-	●
							2.14	0.8	●	●	●	-	●
							1.79	1.2	●	●	●	-	●
							1.44	1.6	●	●	●	-	●
							1.08	2.0	●	●	●	-	●
							0.72	2.4	●	●	●	-	●
							0.20	3.0	●	●	●	-	●
 Single-sided General purpose (G-class)	LOGT 120640ER-GM 120650ER-GM 120660ER-GM	2	6.6	9.56 9.40 9.24	4.55	13.28	1.69	4.0	●	●	●	-	●
							0.63	5.0	●	●	●	-	●
							0.37	6.0	●	●	●	-	●
 Low cutting force (G-class)	LOGU 120604ER-SM 120608ER-SM 120612ER-SM 120616ER-SM 120620ER-SM 120624ER-SM 120630ER-SM	4	6.6	10.10 10.04 9.97 9.92 9.85 9.79 9.69	4.55	13.28	2.50	0.4	●	●	-	-	●
							2.14	0.8	●	●	-	-	●
							1.79	1.2	●	●	-	-	●
							1.44	1.6	●	●	-	-	●
							1.08	2.0	●	●	-	-	●
							0.72	2.4	●	●	-	-	●
							0.20	3.0	●	●	-	-	●
 Tough edge (G-class)	LOGU 120608ER-GH	4	6.6	10.16	4.55	13.25	2.26	0.8	●	●	●	●	-


● : Available

Recommended cutting conditions ★ 1st recommendation ☆ 2nd recommendation



Type	Workpiece material	Toolholder description and feed rate (fz: mm/t)				Recommended insert grade (Vc: m/min)				
		09 size (LOGU09...)		12 size (LOGU12...)		MEGACOAT NANO EX			MEGACOAT HARD	CVD coating
		MA90-16~ MA90-18	MA90-20~MA90-50 MA90-040~MA90-063	MA90-25~ MA90-30	MA90-32~MA90-50 MA90-040~MA90-125	PR1825	PR1835	PR1810	PRO15S	CA6535
General purpose GM	Carbon steel	0.05 - 0.1 - 0.14	0.05 - 0.1 - 0.16	0.05 - 0.1 - 0.18	0.06 - 0.15 - 0.23	★ 120 - 180 - 250	☆ 120 - 180 - 250	-	-	-
	Alloy steel	0.05 - 0.08 - 0.12	0.05 - 0.1 - 0.14	0.05 - 0.1 - 0.16	0.06 - 0.13 - 0.2	★ 100 - 160 - 220	☆ 100 - 160 - 220	-	-	-
	Mold steel	0.05 - 0.08 - 0.1	0.05 - 0.1 - 0.12	0.05 - 0.1 - 0.14	0.06 - 0.12 - 0.18	★ 80 - 140 - 180	☆ 80 - 140 - 180	-	-	-
	Austenitic stainless steel	0.05 - 0.08 - 0.1	0.05 - 0.1 - 0.12	0.05 - 0.1 - 0.14	0.06 - 0.12 - 0.18	☆ 100 - 160 - 200	★ 100 - 160 - 200	-	-	-
	Martensitic stainless steel	0.05 - 0.08 - 0.1	0.05 - 0.1 - 0.12	0.05 - 0.1 - 0.14	0.06 - 0.12 - 0.18	-	☆ 150 - 200 - 250	-	-	★ 180 - 240 - 300
	Precipitation hardened stainless steel	0.05 - 0.08 - 0.1	0.05 - 0.1 - 0.12	0.05 - 0.1 - 0.14	0.06 - 0.12 - 0.18	-	★ 90 - 120 - 150	-	-	-
	Grey cast iron	0.05 - 0.1 - 0.14	0.05 - 0.1 - 0.16	0.05 - 0.1 - 0.18	0.06 - 0.15 - 0.23	-	-	☆ 120 - 180 - 250	-	-
	Ductile cast iron	0.05 - 0.08 - 0.1	0.05 - 0.1 - 0.12	0.05 - 0.1 - 0.14	0.06 - 0.12 - 0.18	-	-	☆ 100 - 150 - 200	-	-
	Ni-based heat resistant alloys	0.05 - 0.06 - 0.08	0.05 - 0.08 - 0.1	0.05 - 0.08 - 0.12	0.06 - 0.1 - 0.15	-	☆ 20 - 30 - 50	-	-	★ 20 - 30 - 50
Titanium alloy (Ti-6Al-4V)	0.05 - 0.08 - 0.1	0.05 - 0.09 - 0.12	0.05 - 0.09 - 0.12	0.06 - 0.1 - 0.15	-	☆ 30 - 50 - 70	-	-	-	
Low cutting force SM	Carbon steel	0.05 - 0.08 - 0.11	0.05 - 0.1 - 0.14	0.05 - 0.1 - 0.14	0.06 - 0.1 - 0.18	★ 120 - 180 - 250	☆ 120 - 180 - 250	-	-	-
	Alloy steel	0.05 - 0.07 - 0.1	0.05 - 0.08 - 0.12	0.05 - 0.08 - 0.12	0.06 - 0.1 - 0.14	★ 100 - 160 - 220	☆ 100 - 160 - 220	-	-	-
	Mold steel	0.05 - 0.07 - 0.1	0.05 - 0.08 - 0.1	0.05 - 0.08 - 0.12	0.06 - 0.1 - 0.14	★ 80 - 140 - 180	☆ 80 - 140 - 180	-	-	-
	Austenitic stainless steel	0.05 - 0.08 - 0.11	0.05 - 0.08 - 0.12	0.05 - 0.08 - 0.12	0.06 - 0.1 - 0.14	☆ 100 - 160 - 200	★ 100 - 160 - 200	-	-	-
	Martensitic stainless steel	0.05 - 0.08 - 0.11	0.05 - 0.08 - 0.12	0.05 - 0.08 - 0.12	0.06 - 0.1 - 0.14	-	☆ 150 - 200 - 250	-	-	★ 180 - 240 - 300
	Precipitation hardened stainless steel	0.05 - 0.08 - 0.11	0.05 - 0.08 - 0.12	0.05 - 0.08 - 0.12	0.06 - 0.1 - 0.14	-	★ 90 - 120 - 150	-	-	-
	Ni-based heat resistant alloys	0.05 - 0.06 - 0.08	0.05 - 0.08 - 0.1	0.05 - 0.08 - 0.1	0.06 - 0.08 - 0.12	-	☆ 20 - 30 - 50	-	-	★ 20 - 30 - 50
	Titanium alloy (Ti-6Al-4V)	0.05 - 0.08 - 0.1	0.05 - 0.08 - 0.12	0.05 - 0.08 - 0.12	0.06 - 0.09 - 0.12	-	★ 30 - 50 - 70	-	-	-
Tough edge GH	Carbon steel	0.05 - 0.1 - 0.14	0.05 - 0.1 - 0.16	0.05 - 0.1 - 0.18	0.06 - 0.15 - 0.23	★ 120 - 180 - 250	☆ 120 - 180 - 250	-	-	-
	Alloy steel	0.05 - 0.08 - 0.12	0.05 - 0.1 - 0.14	0.05 - 0.1 - 0.16	0.06 - 0.13 - 0.2	★ 100 - 160 - 220	☆ 100 - 160 - 220	-	-	-
	Mold steel	0.05 - 0.08 - 0.1	0.05 - 0.1 - 0.12	0.05 - 0.1 - 0.14	0.06 - 0.12 - 0.18	★ 80 - 140 - 180	☆ 80 - 140 - 180	-	-	-
	Austenitic stainless steel	0.05 - 0.08 - 0.1	0.05 - 0.1 - 0.12	0.05 - 0.1 - 0.14	0.06 - 0.12 - 0.18	☆ 100 - 160 - 200	☆ 100 - 160 - 200	-	-	-
	Martensitic stainless steel	0.05 - 0.08 - 0.1	0.05 - 0.1 - 0.12	0.05 - 0.1 - 0.14	0.06 - 0.12 - 0.18	-	☆ 150 - 200 - 250	-	-	-
	Precipitation hardened stainless steel	0.05 - 0.08 - 0.1	0.05 - 0.1 - 0.12	0.05 - 0.1 - 0.14	0.06 - 0.12 - 0.18	-	☆ 90 - 120 - 150	-	-	-
	Grey cast iron	0.05 - 0.1 - 0.14	0.05 - 0.1 - 0.16	0.05 - 0.1 - 0.18	0.06 - 0.15 - 0.23	-	-	★ 120 - 180 - 250	-	-
	Ductile cast iron	0.05 - 0.08 - 0.1	0.05 - 0.1 - 0.12	0.05 - 0.1 - 0.14	0.06 - 0.12 - 0.18	-	-	★ 100 - 150 - 200	-	-
	Ni-based heat resistant alloys	0.05 - 0.06 - 0.08	0.05 - 0.08 - 0.1	0.05 - 0.08 - 0.12	0.06 - 0.1 - 0.15	-	☆ 20 - 30 - 50	-	-	-
Titanium alloy (Ti-6Al-4V)	0.05 - 0.08 - 0.1	0.05 - 0.09 - 0.12	0.05 - 0.09 - 0.12	0.06 - 0.1 - 0.15	-	☆ 30 - 50 - 70	-	-	-	

The number in bold font is recommended starting conditions. Adjust the cutting speed and the feed rate within the above conditions according to the actual machining situation. Machining with coolant is recommended for Ni-base heat-resistant alloys and titanium alloys. When choosing wet machining for other workpieces, reduce the cutting speed to 70% or less. Face milling does not recommend slotting or pocketing. We recommend setting the Ae to 75% or less. We recommend the small number insert type for Ae of 30% or more. Working above recommended conditions or long-term use can damage the screws. It is recommended to replace the screws regularly. Ramping and helical milling are not recommended if the corner R is R4.0/R5.0/R6.0.

Cutting performance





09 size (LOGU09...) Steel machining (dry)

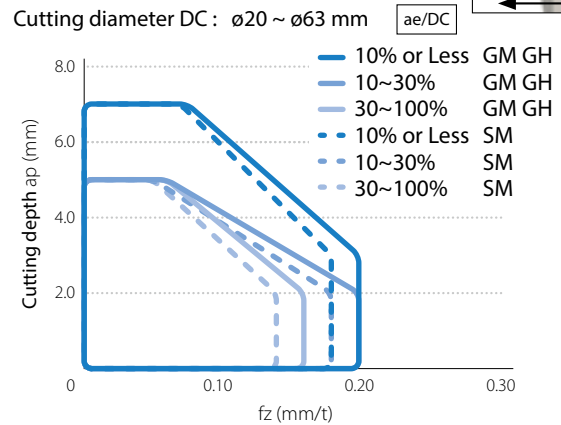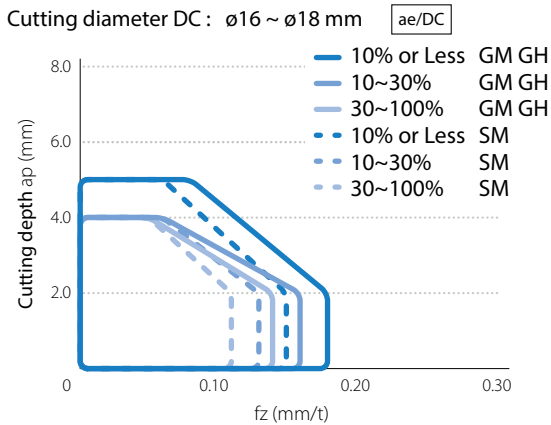

For other workpiece material, set Ap and Fz appropriately for each Ae.


12 size (LOGU12...) Steel machining (dry)

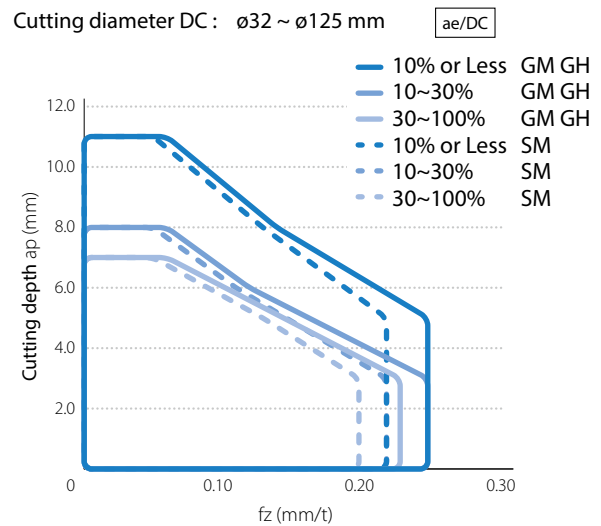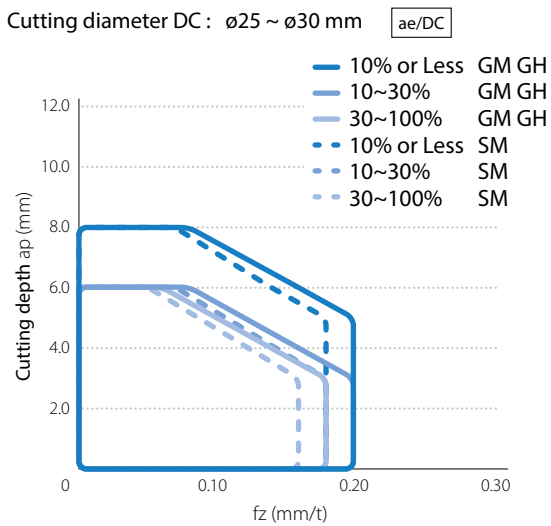

For other workpiece material, set Ap and Fz appropriately for each Ae.

Notes

Applications

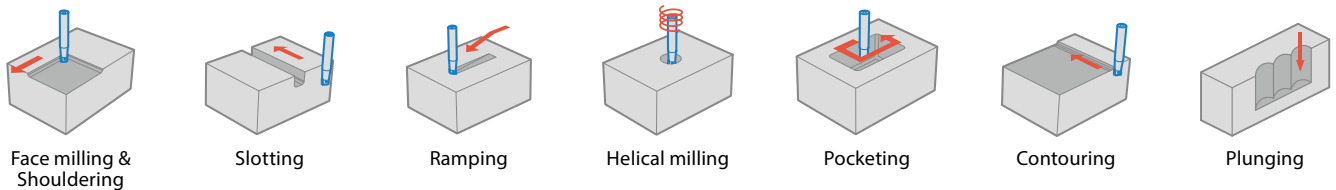

Ramping reference table

Description	Cutter diameter DC (mm)	16	20	25	32	40	50
MA... -09 - ...	Max. ramping angle RMPX	1.16°	0.97°	0.64°	0.4°	0.23°	0.11°
	tan RMPX	0.020	0.017	0.011	0.007	0.004	0.002
Description	Cutter diameter DC (mm)	25	28	30	32	35	40
MA... -12 - ...	Max. ramping angle RMPX	2°	1.7°	1.6°	1.5°	1.2°	1°
	tan RMPX	0.034	0.030	0.027	0.026	0.021	0.017

Decrease the angle of inclination when the chips extend longer.
Ramping is not recommended if the corner R is R4.0/R5.0/R6.0.

Notes


Ramping tips

Ramping angle should be under RMPX.
Reduce recommended feed rate by 70%

Formula for min. cutting length (L) at max. ramping angle

$$L = \frac{ap}{\tan RMPX}$$

Ramping is not recommended if the corner R is R4.0/R5.0/R6.0.

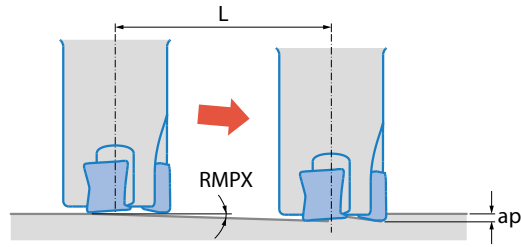


Helical milling tips

For helical milling, use between min. cutting diameter and max. cutting diameter.

Exceeding max. cutting diameter

Center core remains after machining




Units: mm

Description	Min. cutting diameter øDh1	Max. cutting diameter øDh2
MA...-09-...	2×DC-4	2×DC-2
MA...-12-...	2×DC-6	2×DC-2

Helical milling is not recommended if the corner R is R4.0/R5.0/R6.0.


Less than min. cutting diameter

Center core hits holder body

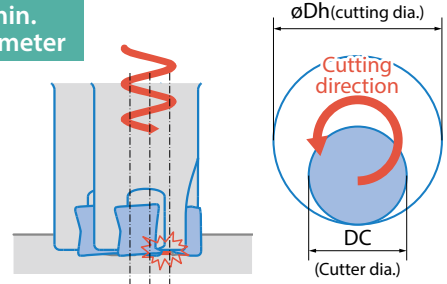

For helical milling, use between min. cutting dia. and max. cutting dia. The cutter direction should be counterclockwise (down cut) (see above). Please machining in a safe environment as long chips may be produced.

Drilling tips

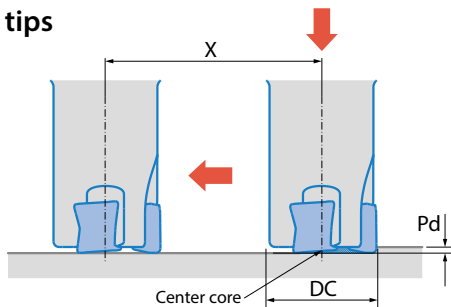


Units: mm

Description	Max. drilling depth Pd	Min. cutting length X for flat bottom surface
MA...-09-...	0.25	DC-3
MA...-12-...	0.5	DC-5

It is recommended to reduce feed by 25% of recommendation until the center core is removed when traversing after drilling.
Axial feed rate recommendation per revolution is $f = 0.1 \text{ mm/rev}$ or less when drilling.

Plunging tips



Available for vertical milling (plunging)
Feed should be set within $fz = 0.1 \text{ (mm/t)}$ when plunging.

Units: mm

Description	Maximum width of cut (Ae)
09 size (LOGU09...)	2
12 size (LOGU12...)	3